




# NTNY BEARING LTD

## 60 mm x 110 mm x 28 mm skf 22212 e bearing

Bearing No. 22212 e

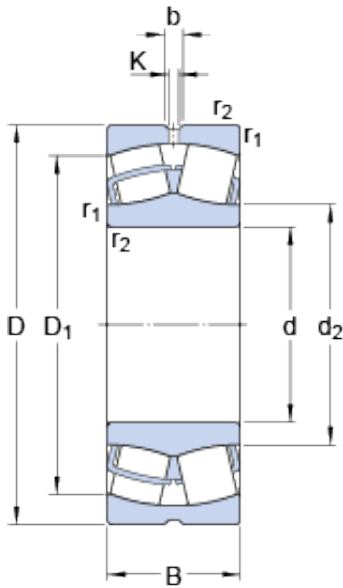

22212 e Bearing 2D drawings and 3D CAD models

Size	110x60x28 mm
Bore Diameter	110 mm
Outer Diameter	60 mm
Width	28 mm
d	60 mm
D	110 mm
B	28 mm
d <sub>2</sub>	72.7 mm
D <sub>1</sub>	96.5 mm
b	6 mm
K	3 mm
r <sub>1,2</sub> - min.	1.5 mm
d <sub>a</sub> - min.	69 mm
D <sub>a</sub> - max.	101 mm
r <sub>a</sub> - max.	1.5 mm
Basic dynamic load rating - C	159 kN
Basic static load rating - C <sub>0</sub>	163 kN
Fatigue load limit - P <sub>u</sub>	18 kN
Reference speed	5600 r/min
Limiting speed	7500 r/min
Calculation factor - e	0.24
Calculation factor - Y <sub>1</sub>	2.8
Calculation factor - Y <sub>2</sub>	4.2
Calculation factor - Y <sub>0</sub>	2.8



## NTNY BEARING LTD

Category	Spherical Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1.174
EAN	7316576652202
Product Group	B04311
Internal Clearance	C0-Medium
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
Bore Profile	Straight
Cage Material	Steel
Enclosure	Open
Number of Rows of Rollers	Double Row
Relubricatable	Yes
Withdrawal Sleeve	Not Applicable
Withdrawal Nut	Not Applicable
Inch - Metric	Metric
Long Description	60MM Straight Bore; 110MM Outside Diameter; 28MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
Category	Spherical Roller Bearing
UNSPSC	31171510
Harmonized Tariff Code	84823080
Noun	Bearing
Keyword String	Spherical
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Weight / LBS	2.586
Bore	2.362 Inch   60 Millimeter



## NTNY BEARING LTD

Adapter Part Number	Not Applicable Inch   Not Applicable Millimeter
Outside Diameter	4.331 Inch   110 Millimeter
Width	1.102 Inch   28 Millimeter
bore diameter:	60 mm
maximum rpm:	7500 RPM
outside diameter:	110 mm
operating temperature range:	Maximum of +390 ° F
overall width:	28 mm
cage material:	Steel
bore type:	Straight
bearing material:	Steel
outer ring type:	Not Split
cage type:	Inner Ring Guided
internal clearance:	C0
precision rating:	Not Rated
closure type:	Open
finish/coating:	Uncoated
lubrication hole type:	Lubrication Groove & Hole
outer ring width:	28 mm
dynamic load capacity:	156 kN
fillet radius:	1.5 mm
static load capacity:	166 kN
series:	222
$d_2$	72.7 mm
$D_1$	96.5 mm
$r_{1,2}$ min.	1.5 mm
$d_a$ min.	69 mm
$D_a$ max.	101 mm
$r_a$ max.	1.5 mm
Basic dynamic load rating C	159 kN
Basic static load rating $C_0$	166 kN



## NTNY BEARING LTD

Fatigue load limit $P_u$	18.6 kN
Calculation factor $e$	0.24
Calculation factor $Y_1$	2.8
Calculation factor $Y_2$	4.2
Calculation factor $Y_0$	2.8
Mass bearing	1.15 kg