




# NTNY BEARING LTD

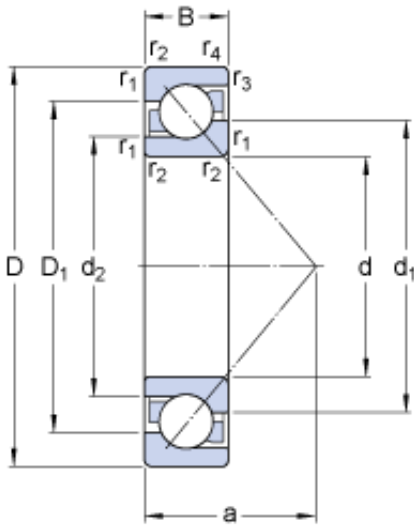

45 mm x 100 mm x 25 mm skf 7309 becgp bearing

Bearing No. 7309 becgp

7309 becgp Bearing 2D drawings and 3D CAD models

Size	100x45x25 mm
Bore Diameter	100 mm
Outer Diameter	45 mm
Width	25 mm
d	45 mm
D	100 mm
B	25 mm
d <sub>1</sub>	66.5 mm
d <sub>2</sub>	55.25 mm
D <sub>1</sub>	79.9 mm
a	43 mm
r <sub>1,2</sub> - min.	1.5 mm
r <sub>3,4</sub> - min.	1 mm
d <sub>a</sub> - min.	54 mm
D <sub>a</sub> - max.	91 mm
D <sub>b</sub> - max.	94.4 mm
r <sub>a</sub> - max.	1.5 mm
r <sub>b</sub> - max.	1 mm
Basic dynamic load rating - C	61 kN
Basic static load rating - C <sub>0</sub>	40.5 kN
Fatigue load limit - P <sub>u</sub>	1.7 kN
Reference speed	9000 r/min
Limiting speed	9000 r/min
Calculation factor - k <sub>r</sub>	0.1



## NTNY BEARING LTD

Calculation factor - $k_a$	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - $Y_0$	0.52
Calculation factor - $Y_1$	0.55
Calculation factor - $Y_2$	0.93
Calculation factor - X	0.35
Calculation factor - $Y_0$	0.26
Calculation factor - $Y_1$	
Calculation factor - $Y_2$	0.57
Category	Angular Contact Ball Bearings
Inventory	25.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.81
EAN	7316576634161
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



## NTNY BEARING LTD

Long Description	45MM Bore; 100MM Outside Diameter; 25MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7309 BECBP
Weight / LBS	1.79
Outside Diameter	3.937 Inch   100 Millimeter
Width	0.984 Inch   25 Millimeter
Bore	1.772 Inch   45 Millimeter
bore diameter:	45 mm
radial static load capacity:	40-1/2 kN
outside diameter:	100 mm
cage material:	Nylon
overall width:	25 mm
outer ring width:	25 mm
contact angle:	40 °
maximum rpm:	9000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	1.5 mm



## NTNY BEARING LTD

radial dynamic load capacity:	61 kN
series:	73
$d_1$	66.5 mm
$d_2$	55.25 mm
$D_1$	79.9 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1 mm
$d_a$ min.	54 mm
$D_a$ max.	91 mm
$D_b$ max.	94.4 mm
$r_a$ max.	1.5 mm
$r_b$ max.	1 mm
Basic dynamic load rating C	61 kN
Basic static load rating $C_0$	40.5 kN
Fatigue load limit $P_u$	1.73 kN
Calculation factor A	0.0268
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.82 kg