




# NTNY BEARING LTD

## skf 51112 bearing

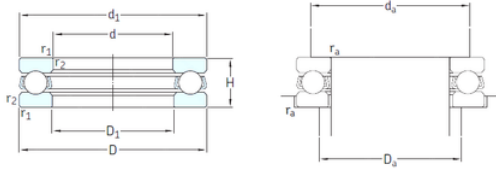

Bearing No. 51112

51112 Bearing 2D drawings and 3D CAD models

Size	60x85x17 mm
Bore Diameter	60 mm
Outer Diameter	85 mm
Width	17 mm
d	60 mm
D	85 mm
H	17 mm
d1	85 mm
r1 min.	1 mm
r2 min.	1 mm
D1	62 mm
da min.	75 mm
Da max.	70 mm
ra max.	1 mm
Weight	0,27 Kg
Basic dynamic load rating (C)	41,6 kN
Basic static load rating (C0)	122 kN
Fatigue load limit (Pu)	4,55
Reference speed	3600 r/min
Limiting speed	5000 r/min
Category	Thrust Ball Bearing
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.309
Product Group	B00308



## NTNY BEARING LTD

Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Single Direction
Banded	No
Cage Material	Steel
Precision Class	ABEC 1   ISO P0
Component Description	Roller Assembly Plus Raceways
Other Features	Single Row
Long Description	60MM Bore 1; 62MM Bore 2; 85MM Outside Diameter; 17MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1   ISO P0 Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171507
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	51112
Weight / LBS	0.68
Outside Diameter	3.346 Inch   85 Millimeter
Bore 2	2.441 Inch   62 Millimeter
Bore 1	2.362 Inch   60 Millimeter
Height	0.669 Inch   17 Millimeter
Overall Height with Aligning Washer	0 Inch   0 Millimeter
bore diameter:	60 mm
static load capacity:	122 kN
outside diameter:	85 mm
dynamic load capacity:	41.6 kN



## NTNY BEARING LTD

overall width:	17 mm
maximum rpm:	5000 RPM
thrust bearing type:	Single-Direction
cage material:	Steel
outside diameter design:	Straight
fillet radius:	1 mm
separable or banded:	Separable
series:	511
precision rating:	ABEC 1 (ISO Class Normal)
$d_1$	85 mm
$D_1$	62 mm
$r_{1,2}$ min.	1 mm
$d_a$ min.	75 mm
$D_a$ max.	70 mm
$r_a$ max.	1 mm
Basic dynamic load rating C	41.6 kN
Basic static load rating $C_0$	122 kN
Fatigue load limit $P_u$	4.55 kN
Minimum load factor A	0.077
Mass bearing (including seat washer where applicable)	0.27 kg