




NTNY BEARING LTD

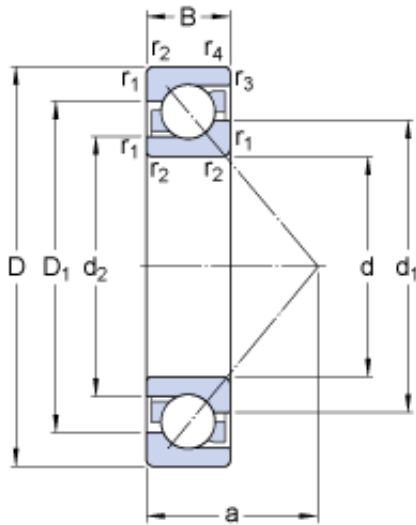

7203 becgp Bearing 2D drawings and 3D CAD models

17 mm x 40 mm x 12 mm skf 7203 becgp bearing

Bearing No. 7203 becgp

Size	40x17x12 mm
Bore Diameter	40 mm
Outer Diameter	17 mm
Width	12 mm
d	17 mm
D	40 mm
B	12 mm
d_1	26.25 mm
d_2	21.66 mm
D_1	31.15 mm
a	18 mm
$r_{1,2}$ - min.	0.6 mm
$r_{3,4}$ - min.	0.6 mm
d_a - min.	21.2 mm
D_a - max.	35.8 mm
D_b - max.	35.8 mm
r_a - max.	0.6 mm
r_b - max.	0.6 mm
Basic dynamic load rating - C	11 kN
Basic static load rating - C_0	5.8 kN
Fatigue load limit - P_u	0.25 kN
Reference speed	22000 r/min
Limiting speed	22000 r/min
Calculation factor - k_r	0.095



NTNY BEARING LTD

Calculation factor - k_a	1.4
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.06
EAN	7316577067654
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



NTNY BEARING LTD

Long Description	17MM Bore; 40MM Outside Diameter; 12MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7203 BECBP
Weight / LBS	0.141
Bore	0.669 Inch 17 Millimeter
Outside Diameter	1.575 Inch 40 Millimeter
Width	0.472 Inch 12 Millimeter
bore diameter:	17 mm
radial static load capacity:	5.85 kN
outside diameter:	40 mm
cage material:	Nylon
overall width:	12 mm
outer ring width:	12 mm
contact angle:	40 °
maximum rpm:	22000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	0.6 mm



NTNY BEARING LTD

radial dynamic load capacity:	11 kN
series:	72
d_1	26.25 mm
d_2	21.66 mm
D_1	31.15 mm
$r_{1,2}$ min.	0.6 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	21.2 mm
D_a max.	35.8 mm
D_b max.	35.8 mm
r_a max.	0.6 mm
r_b max.	0.6 mm
Basic dynamic load rating C	11 kN
Basic static load rating C_0	5.85 kN
Fatigue load limit P_u	0.25 kN
Calculation factor A	0.000625
Calculation factor k_r	0.095
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	0.065 kg