




# NTNY BEARING LTD

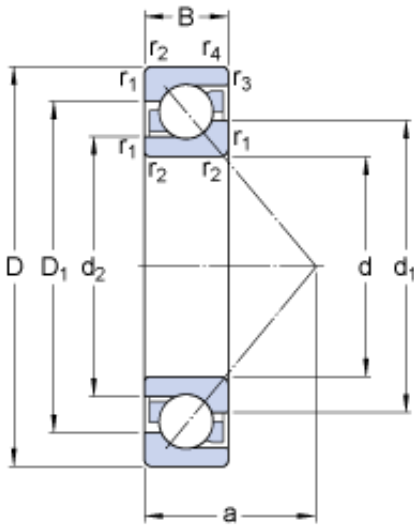

30 mm x 72 mm x 19 mm skf 7306 becbm bearing

Bearing No. 7306 becbm

7306 becbm Bearing 2D drawings and 3D CAD models

Size	72x30x19 mm
Bore Diameter	72 mm
Outer Diameter	30 mm
Width	19 mm
d	30 mm
D	72 mm
B	19 mm
d <sub>1</sub>	46.5 mm
d <sub>2</sub>	37.9 mm
D <sub>1</sub>	56.6 mm
a	31 mm
r <sub>1,2</sub> - min.	1.1 mm
r <sub>3,4</sub> - min.	0.6 mm
d <sub>a</sub> - min.	37 mm
D <sub>a</sub> - max.	65 mm
D <sub>b</sub> - max.	67.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
Basic dynamic load rating - C	35.5 kN
Basic static load rating - C <sub>0</sub>	21.2 kN
Fatigue load limit - P <sub>u</sub>	0.9 kN
Reference speed	13000 r/min
Limiting speed	13000 r/min
Calculation factor - k <sub>r</sub>	0.1



## NTNY BEARING LTD

Calculation factor - $k_a$	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - $Y_0$	0.52
Calculation factor - $Y_1$	0.55
Calculation factor - $Y_2$	0.93
Calculation factor - X	0.35
Calculation factor - $Y_0$	0.26
Calculation factor - $Y_1$	
Calculation factor - $Y_2$	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.378
EAN	7316576633843
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



## NTNY BEARING LTD

Long Description	30MM Bore; 72MM Outside Diameter; 19MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7306 BECBM
Weight / LBS	0.806
Bore	1.181 Inch   30 Millimeter
Width	0.748 Inch   19 Millimeter
Outside Diameter	2.835 Inch   72 Millimeter
bore diameter:	30 mm
radial static load capacity:	21.2 kN
outside diameter:	72 mm
cage material:	Brass
overall width:	19 mm
outer ring width:	19 mm
contact angle:	40 °
maximum rpm:	13000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	1 mm



## NTNY BEARING LTD

radial dynamic load capacity:	35.5 kN
series:	73
$d_1$	46.5 mm
$d_2$	37.9 mm
$D_1$	56.6 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	37 mm
$D_a$ max.	65 mm
$D_b$ max.	67.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
Basic dynamic load rating C	35.5 kN
Basic static load rating $C_0$	21.2 kN
Fatigue load limit $P_u$	0.9 kN
Calculation factor A	0.0074
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.34 kg